


DW-5K

DATE	CHANGES	INTL	REV
08.30.04	Original		1.00
01.02.09	New Case	JB	1.00

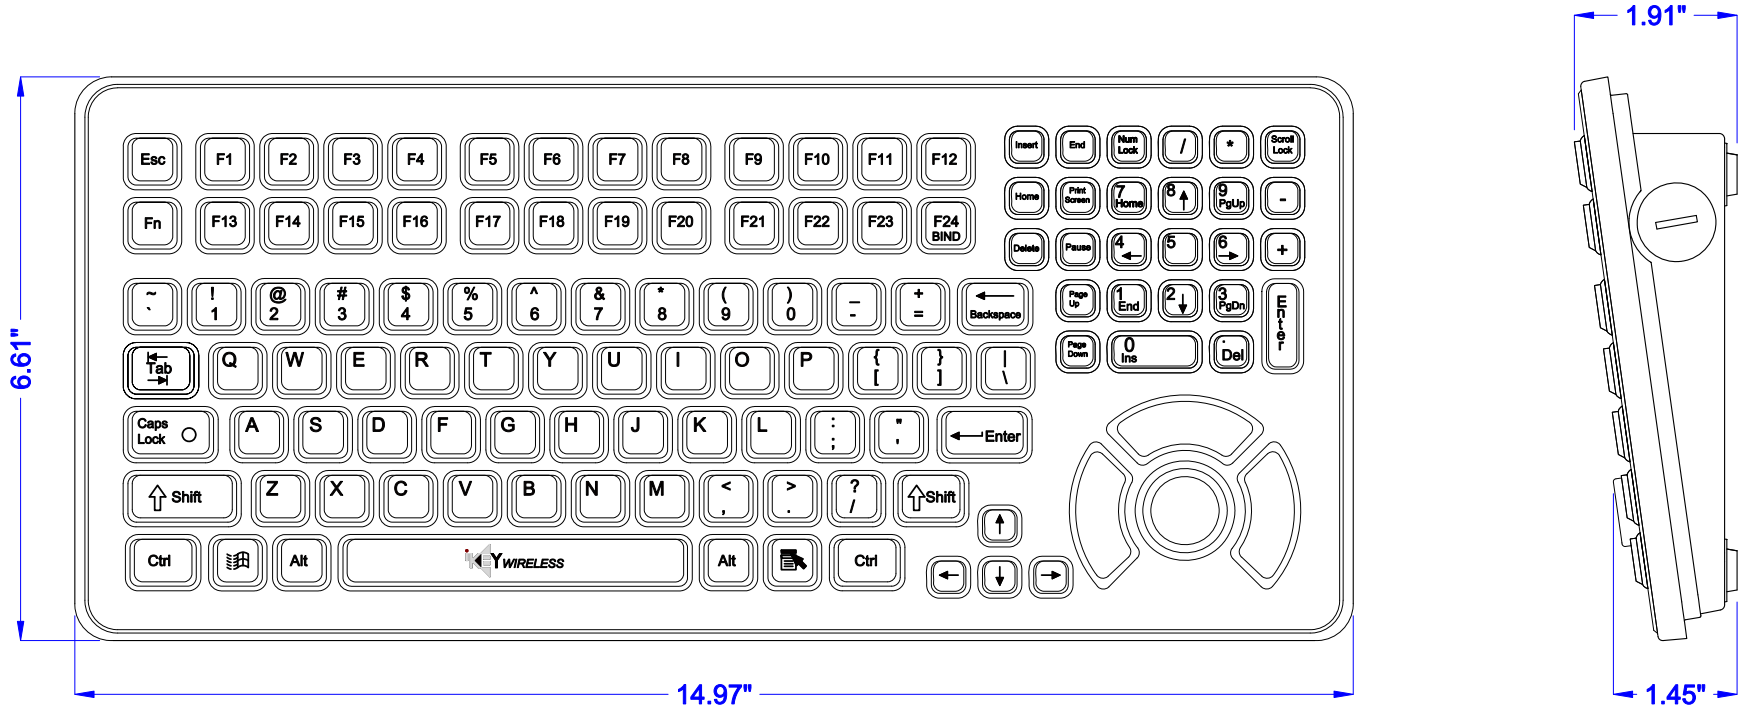

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
LIFE: Greater Than 10 Million Cycles
TRAVEL: 0.055 in.
ACTUATION FORCE: 6.35 oz. +/- 1.06oz (180g +/- 30g)
FEEDBACK: Tactile with Mechanical Snap

POWER

WIRELESS: 3 AA Batteries

TEMPERATURE RANGE

STORAGE: -40°F to +158°F (-40°C to +70°C)
OPERATING: -4°F to +140°F (-20°C to +60°C)

HUMIDITY

100% Humidity Resistant

VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ
FREQUENCY RANGE: 20Hz-2Khz
DURATION OF TEST PER AXIS: 3 hours

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

2.25 lbs +/- 0.10 lbs (1.02 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2.25



iKey, Ltd.
 2621 Ridgpoint Dr. Suite 235
 Austin, Texas 78754


©2008 iKey, Ltd.
 Voice: (512) 837-0283
 Fax: (512) 927-8630

Part Number: DW-5K
Drawing Title: DW-5K-MKT

Drawing Number: MKT0033
Revision: 1.00

Sheet: 1 OF 2
Date: 01.02.09
JWB

DW-5K BACK / MOUNTING

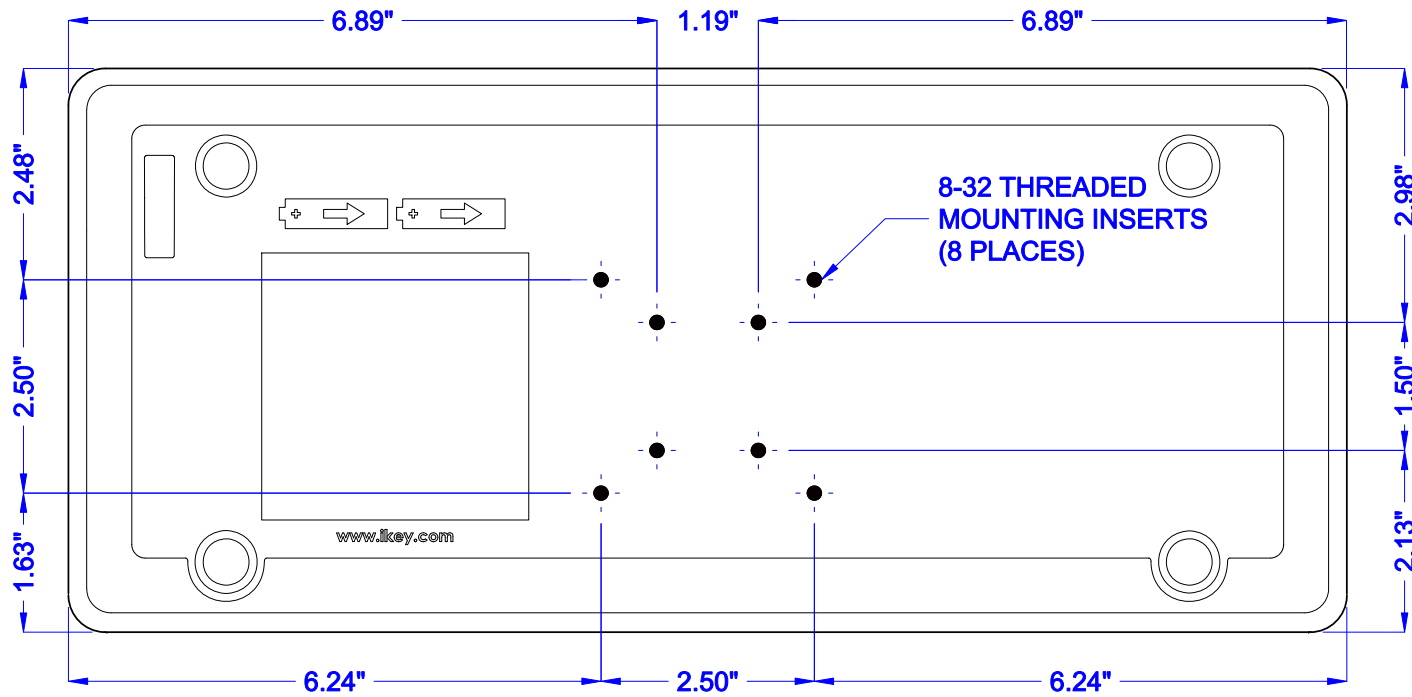

ENCLOSURE CASE: ABS/Polycarbonate

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2.25



iKey, Ltd.
2621 Ridgpoint Dr. Suite 235
Austin, Texas 78754

©2008 iKey, Ltd.
Voice: (512) 837-0283
Fax: (512) 927-8630

Part Number: DW-5K
Drawing Title: DW-5K-MKT

Drawing Number: MKT0033
Revision: 1.00

Sheet: 2 OF 2
Date: 01.02.09
JWB